

# Automatic Voltage Regulator

**Koala** 600VA~1500VA

## ► Features:

- Automatically adjust low or high voltage.
- Suitable for Home and Office equipment.
- Heavy duty reliable design.
- Able to reset input overload protection circuit breaker.
- Lightning and spike protection.
- RJ-45 connection provides surge and spike protection.

CE






# Koala 600VA~1500VA

## ► Specification:

Model	Koala	600	1000	1500
Capacity	VA / Watts	600VA / 420W	1000VA / 700W	1500VA / 1050W
Input	Normal Voltage	120VAC		
	Frequency	47Hz~63Hz		
	Input Voltage Range	88VAC-144VAC		
Output	Output Voltage Range	108VAC-132VAC		
	Outlet Quantity / Type	4PCS / NEMA5-15R or 2PCS / UNIVERSAL	6PCS / NEMA5-15R or 2PCS / UNIVERSAL	
	AC Surge Suppression	240 joules		
	Network Surge Suppression	RJ-45		
LED	Power On / Off	Green LED		
	AVR Regulation	Boost-Orange LED, Buck-Red LED		
Dimension	D x W x H (mm)	152 x 110 x 175		
Weight	Net Weight	1.4 kgs	1.7 kgs	2.3 kgs
Environment	Operating Temperature	0°C~40°C; 32°F~104°F; <95%(Non-Condensing)		
	Noise Level	<40DB		
Warranty	Term	2 years		



### Power Supply Side

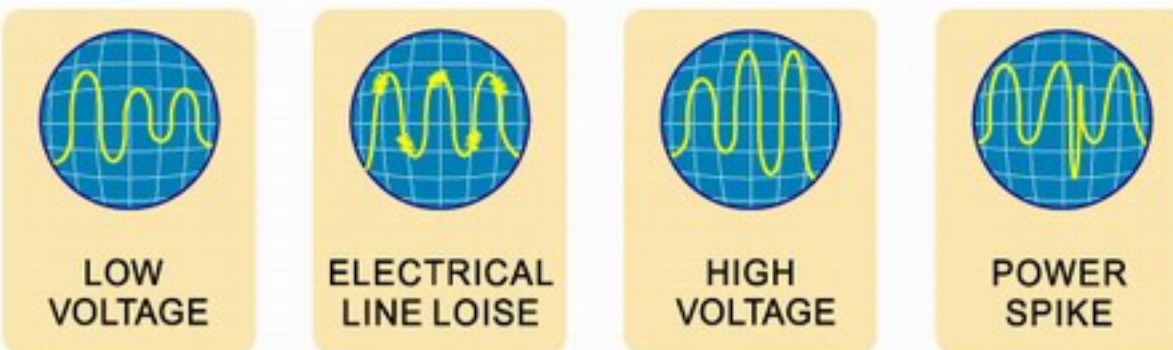


### AVR Stabilizer



### ► Real Panel

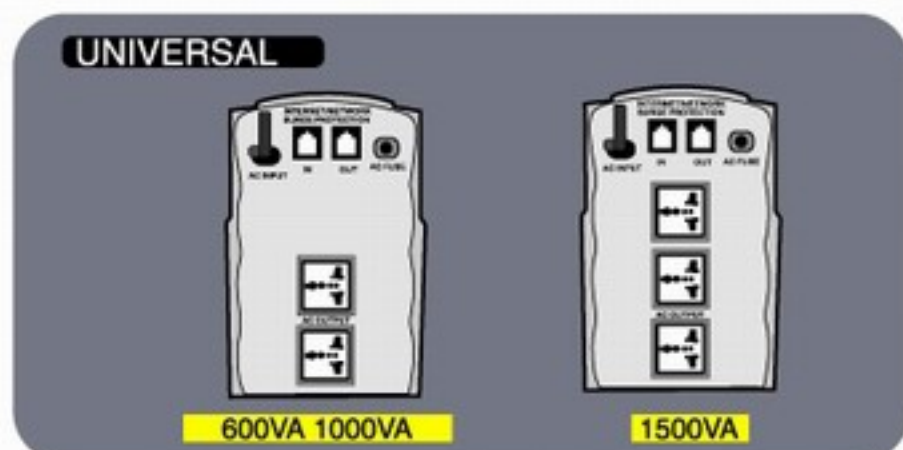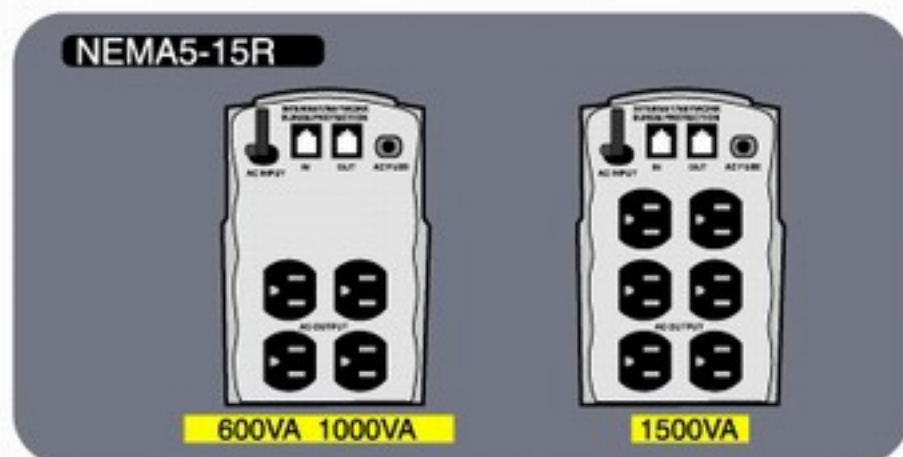

### Load Side

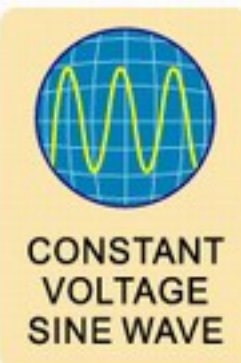

### APLUS POWER CORP.

No. 36-3 Nanan Road, Tzu-Tong, Yunlin Hsien, Taiwan, R.O.C.

#### Sale Office

Tel: 886-2-28341269

Fax: 886-2-28341449

<http://www.aplusups.com.tw>

E-mail: [sales@aplusups.com.tw](mailto:sales@aplusups.com.tw)