PlusCharger 6 Series

The PlusCharger 6-10A-12M is a Surge Protector rated at 10 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 6-10A-12M can provide reliable protection from power surges and damaging spikes to guard your small appliances and sensitive electronics.

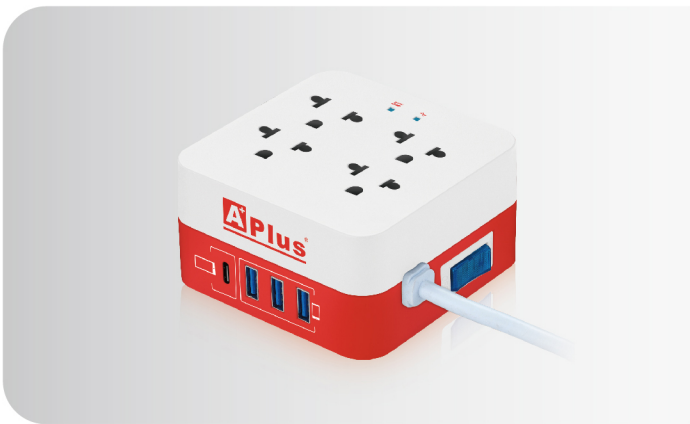

- Absorbs Excess Electricity through MOVs
- Power Switch with Resettable Circuit Breaker
- Fire Retardant Plastic Material
- Provide Lightning, Surge, Overload Protection
- Surge Suppression 900 Joules
- Smart Charging Station 5VDC USB Charging Port

Specifications:

MODEL	PlusCharger 6-10A-12M
INPUT	
AC Rating	110 - 240Vac
Frequency	50/60Hz (Auto-sensing)
Type of Input	Nema5-15P plug
Cable Length	1.2M (3.9ft)
OUTPUT	
Type of Output: EURO-US	4 receptacles
USB Charging Port	5VDC, 4 ports, 2.4A Max.
INDICATOR	
POWER ON	Blue LED is ON
5VDC USB Charging	Blue LED is ON
PROTECTION	
Surge Rating	900 Joules
Overload Protection	Yes
Power Safety Shutdown	Yes

*Product specifications are subject to change without further notice.

APlus® UPS SYSTEMS