PlusCharger 3 Series

The PlusCharger 3 Series is a Smart Charger Station rated at 10 Amps, it provides overload protection through power switch with built-in resettable circuit breaker. Built in MOV excess electricity for additional protection. It also equipped with smart charging station, SC-5VDC, USB charging port for smart devices power charging. The PlusCharger 3 Series can ensure electrical safety and also provide power for devices with cables that can't reach any nearby electrical outlets.

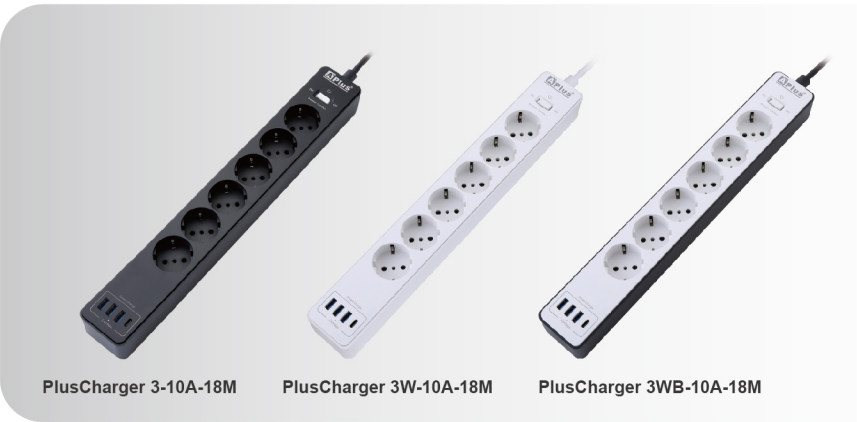

PlusCharger 3-10A-18M PlusCharger 3W-10A-18M PlusCharger 3WB-10A-18M

- Absorbs Excess Electricity through MOVs
- Power Switch with Resettable Circuit Breaker
- Fire Retardant Plastic Material
- Provide Lightning, Surge, Overload Protection
- Surge Suppression 900 Joules
- Smart Charging Station 5VDC USB Charging Port
- Grounded Multi-outlet Design
- Wall Mountable

Specifications:

MODEL	PlusCharger 3-10A-18M	PlusCharger 3W-10A-18M	PlusCharger 3WB-10A-18M
INPUT			
Voltage Range	220 - 240Vac		
Frequency	50Hz or 60Hz		
Type of Input	German plug		
Cable Length	1.8M (5.9ft), 1 mm^2		
OUTPUT			
Power Rating	10A		
Type of Output: Schuko	6 receptacles		
USB Charging Port	5VDC, 4 ports, 3.4A Max.		
PROTECTION			
Surge Rating	900 Joules		
Overload Protection	Yes		
Power Safety Shutdown	Yes		
PHYSICAL			
Dimensions	375*55*43mm		

*Product specifications are subject to change without further notice.

APlus® UPS SYSTEMS